

**CHENNAI PORT TRUST
CIVIL ENGINEERING DEPARTMENT
NO.1 RAJAJI SALAI
CHENNAI - 600 001**

WMA7/ 752 /2018/E

BUDGETARY OFFER FOR “DISMANTLING AND DEMOLISHING THE EXISTING DAMAGED CIRCULAR RCC OVER HEAD TANK OF 50,000 GALLONS CAPACITY NEAR PUMP ROOM NO:14 OPPOSITE TO DISPENSARY AT TONDIARPET HOUSING COLONY”

SUBMISSION ON OR BEFORE 24.01.2019

Chennai Port Trust invites budgetary offers for **“Dismantling and demolishing the existing damaged circular RCC over head tank of 50,000 Gallons capacity near pump room No:14 opposite to dispensary at Tondiarpet Housing Colony”**. Kindly furnish your budgetary offer in the enclosed format and submit the same to the Executive Engineer (MDO), 3rd Floor, Old Administrative Office Building, Civil Engineering Department, Chennai Port Trust, No.1, Rajaji Salai, Chennai - 600001 on or before **24.01.2019**.

CHENNAI PORT TRUST

Budgetary offer for “Dismantling and demolishing the existing damaged circular RCC over head tank of 50,000 Gallons capacity near pump room No:14 opposite to dispensary at Tondiarpet Housing Colony”

Description of RCC Over head tank :-

Capacity of OHT – 50000 Gallons, Height of OHT – 22 metres, Floor dia – 6.81 meter, Columns size 0.45m x 0.45m – Nos. Tie beam – 3 levels – 0.45m x 0.30m , MS Steel ladder, MS Hand rails, RC inspection platform, etc.,


S.No	Description	Basic price Rs.	GST	Total Rs.
1.	Assessed salvageable value of useful material from damaged RCC over head tank in pump room No.14. (A) <i>Note :- GST for the salvageable value borne by the contractor.</i>			
2.	Dismantling the RCC over head tank up to ground level, taking away all the salvageable materials, clearing and carting away the debris / unusable materials from the work spot including barricading, defastening, cutting, handling, stocking etc., as directed at site of work and including all labour, tools, equipments,			

	scaffolding, transport, safety ladders, safety belts, fuel, etc. (B) <i>Note : GST for dismantling cost paid by the Trust as applicable.</i>			
	Net credit value (A) - (B)			

- Note: 1. The firms are advised to inspect the OHT at site, acquaint themselves with the nature of work, conditions at site and also ascertain for themselves the value of the salvageable materials available in the structures to be dismantled before quoting their budgetary offer.
2. The contract period is 3 months.
 3. The firm shall submit GST registration details.
 4. Income tax at the rate of 1% (on the assessed sake value plus corresponding GST) shall be collected along with other taxes, levies and duties as applicable on the Income Tax as per Section 206(C) of the Income tax Act.
 5. The firm shall quote their rate as Base price plus GST as applicable.
 6. The actual quantity of steel materials available in the site will be calculated on weightment basis. The weightment charges shall be borne by the firms and also consider the salvage value of materials and debris to be taken away from the site while quoting their rates.
 7. For further details about demolition, the Executive Engineer(Civil) Tondiarpet Housing Colony, Chennai, Phone No.044 25912168 may be contacted during office hours.

Authorized Signatory of the
firm with seal

TONDARPET HOUSING COLONY

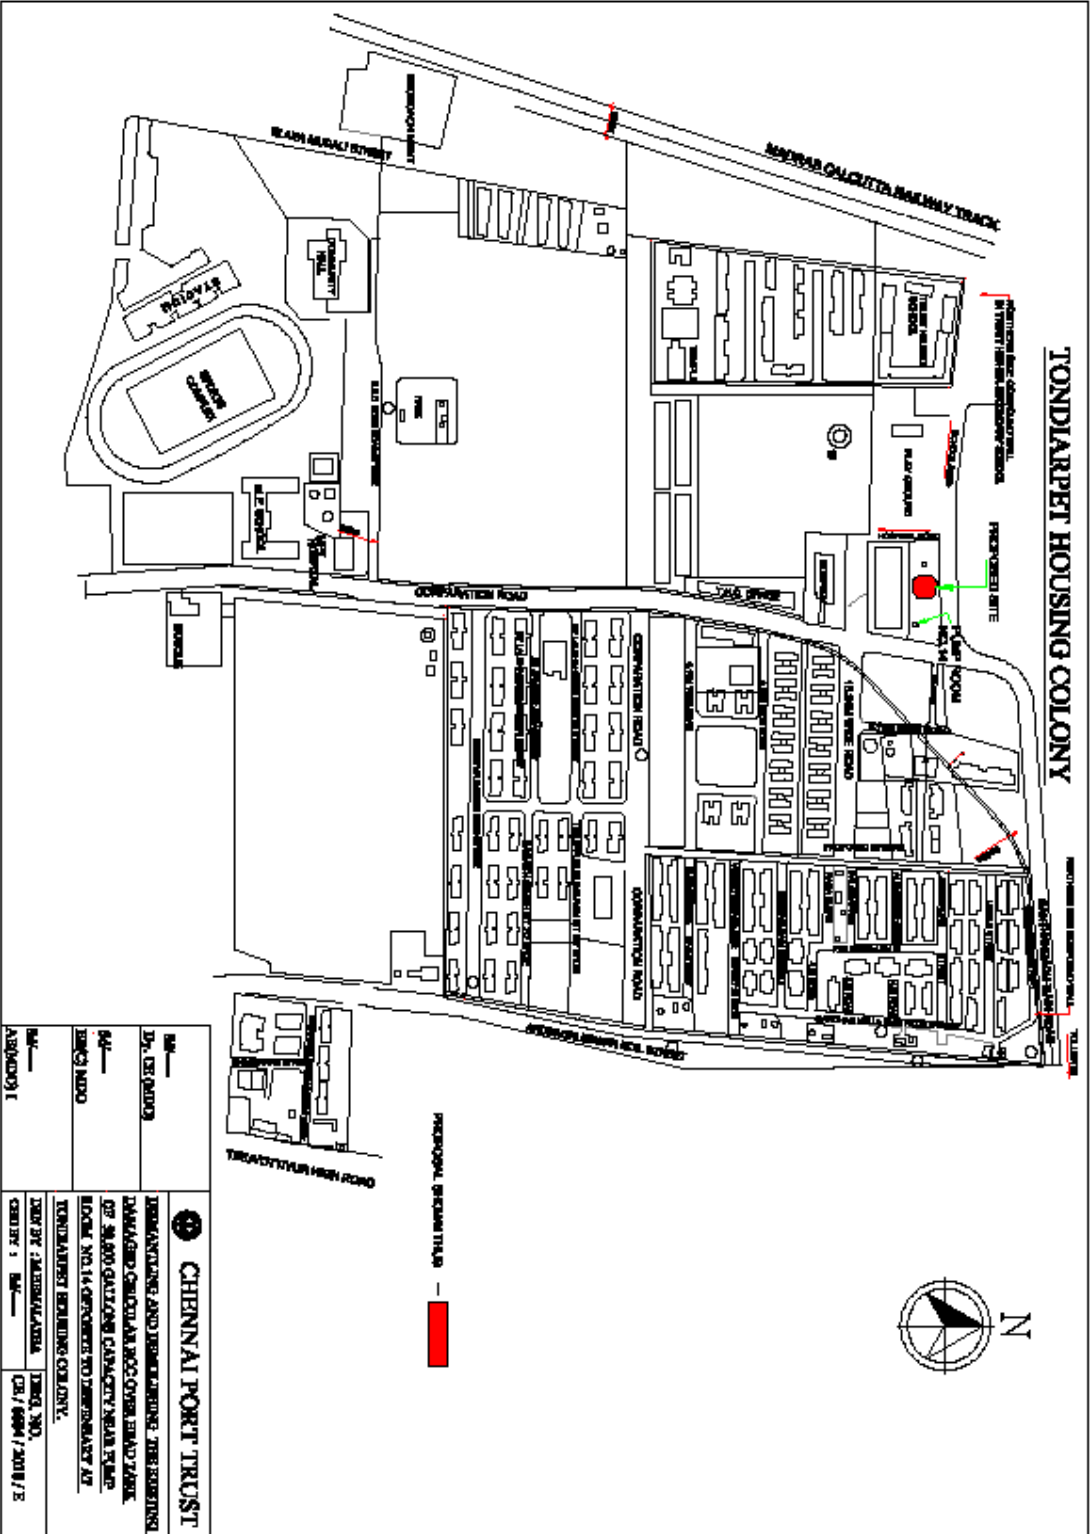

<p>CHENNAI PORT TRUST</p> <p>DEVELOPING AND MAINTAINING THE BESTING DEVELOPED CHENNAI PORT OVER BRADYAN OF 3600 GAZETTED CANALS IN THE YEAR 1906 NO. 14 (FORMER TO TONDARPET AT TONDARPET BUILDING COLONY.</p>	<p>NO. —</p> <p>BY: CHENNAI</p> <p>NO. —</p> <p>NO. —</p> <p>NO. —</p>
<p>DATE BY: 14/08/2018</p> <p>CHECKED BY: 14/08/2018</p>	<p>NO. —</p> <p>NO. —</p> <p>NO. —</p>